

TECHNICAL DATASHEET

Incremental Encoder RI 58-H



- Through hollow shaft
- High accuracy by means of integrated flexible coupling
- Safe shaft mounting
- Applications: textile machines, motors, drives, copiers



NUMBER OF PULSES

1 / 2 / 3 / 4 / 5 / 10 / 15 / 20 / 25 / 30 / 35 / 40 / 45 / 50 / 60 / 64 / 70 / 72 / 80 / **100** / 125 / 128 / 144 / 150 / 180 / 200 / **250** / 256 / 300 / 314 / 350 / 360 / 375 / 400 / 460 / 480 / **500** / 512 / 600 / 625 / 720 / 900 / **1000** / **1024** / **1250** / 1500 / 1600 / 1800 / 2000 / 2048 / **2500** / 3000 / 3480 / **3600** / 4000 / **4096** / **5000**

Other number of pulses on request

Preferably available versions are printed in bold type.

TECHNICAL DATA mechanical

Housing diameter	58 mm
Shaft diameter	10 mm / 12 mm (Hubshaft)
Flange (Mounting of housing)	Synchro flange
Protection class shaft input (EN 60529)	IP64
Protection class housing (EN 60529)	IP64
Shaft tolerance	Ø 10 mm, tolerance g8 (-0.005 ... -0.027 mm), Ø 12 mm, tolerance g8 (-0.006 ... -0.033 mm)
Axial endplay of mounting shaft (hubshaft)	± 0.4 mm
Parallel endplay of mounting shaft	0.4 mm
Angular endplay of mounting shaft	1 °
Max. speed	max. 3000 rpm
Torque	≤ 2 Ncm
Moment of inertia	approx. 65 gcm ² (10 mm shaft) approx. 95 gcm ² (12 mm shaft)
Vibration resistance (DIN EN 60068-2-6)	10 g = 100 m/s ² (10 ... 2000 Hz)
Shock resistance (DIN EN 60068-2-27)	100 g = 1000 m/s ² (6 ms)
Operating temperature	-10 °C ... +70 °C
Storage temperature	-25 °C ... +85 °C
Material housing	Aluminum
Weight	approx. 210 g
Connection	Cable, radial

TECHNICAL DATA electrical

General design	as per DIN VDE 0160, protection class III, contamination level 2, overvoltage class II
----------------	--

TECHNICAL DATASHEET

Incremental Encoder RI 58-H

TECHNICAL DATA electrical (continued)

Supply voltage ¹	RS422 + Sense (T): DC 5 V ±10 % RS422 + Alarm (R): ± 10% DC 5 V or DC 10 - 30 V Push-pull (K), Push-pull antivalent (I): DC 10-30 V
Max. current w/o load	40 mA (DC 5 V), 60 mA (DC 10 V), 30 mA (DC 24 V)
Max. pulse frequency	RS422: 300 kHz Push-pull: 200 kHz
Standard output versions	RS422 + Alarm (R): A, B, N, $\bar{A}$, $\bar{B}$, $\bar{N}$, Alarm RS422 + Sense (T): A, B, N, $\bar{A}$, $\bar{B}$, $\bar{N}$, Sense Push-pull (K): A, B, N, $\bar{A}$ Alarm Push-pull complementary (I): A, B, N, $\bar{A}$, $\bar{B}$, $\bar{N}$, $\bar{A}$ Alarm
Pulse width error	± max. 25° electrical
Number of pulses	1 ... 5000
Pulse shape	Square wave
Pulse duty factor	1:1

¹ Pole protection with supply voltage DC 10 - 30 V

ELECTRICAL CONNECTIONS Cable PVC

Connecting cable Colour	Lead Ø	Output RS422 T and R	push-pull K and I
red	0.5 mm ²	DC 5/10 - 30 V	DC 10 - 30 V
red/yellow	0.14 mm ²	Sense VCC	Sense VCC
white	0.14 mm ²	Channel A	Channel A
white	0.14 mm ²	Channel $\bar{A}$	Channel $\bar{A}$ ¹
green/brown	0.14 mm ²	Channel B	Channel B
green/brown	0.14 mm ²	Channel $\bar{B}$	Channel $\bar{B}$ ¹
yellow	0.14 mm ²	Channel N	Channel N
yellow/brown	0.14 mm ²	Channel $\bar{N}$	Channel $\bar{N}$ ¹
black	0.5mm ²	GND	GND
black/yellow	0.14 mm ²	$\bar{A}$ Alarm/Sense GND ²	$\bar{A}$ Alarm
screen ³		screen ³	screen ³

¹ only push-pull complementary (I)

² depending on ordering code

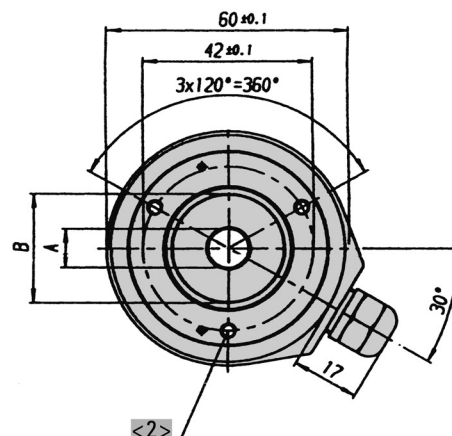
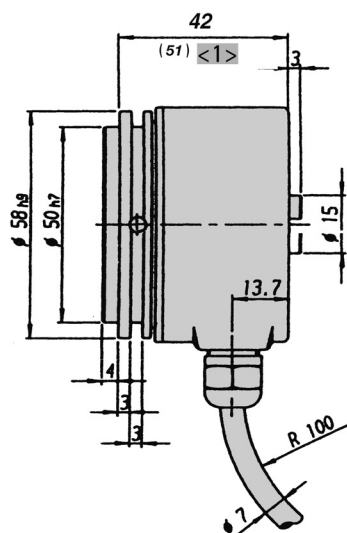
³ connected with encoder housing

TECHNICAL DATASHEET

Incremental Encoder RI 58-H

DIMENSIONED DRAWINGS

Synchro flange



Required dimension of mounting shaft (g8)	Hollow shaft Ø (A)	B	Unit
-0.005 ... -0.027	10 *	28	mm
-0.006 ... -0.033	12 *	33	mm
* Tolerance H7 = 0 ... +0.018 mm			

<1> value in brackets with version DC 10 - 30 V, RS422

<2> mounting thread M4x5

Cable bending radius R for flexible installation ≥ 100 mm

Cable bending radius R for fixed installation ≥ 40 mm

Dimensions in mm

ORDERING INFORMATION

Type	Number of pulses	Supply voltage ^{1,2}	Flange, Protection, Shaft	Output	Connection
☐	☐	☐	☐	☐	☐
RI58-H	1 ... 5000	A DC 5 V E DC 10 - 30 V	S.42 Synchro, IP64, 10 mm S.47 Synchro, IP64, 12 mm	R RS422 +Alarm T RS422 +Sense K Push-pull I Push-pull complementary	B PVC cable, radial

¹ DC 5 V: only with output "T", "R" available

² DC 10 - 30 V: only with output "K", "I", "R" available

TECHNICAL DATASHEET

Incremental Encoder RI 58-H

ORDERING INFORMATION Selection of cable length

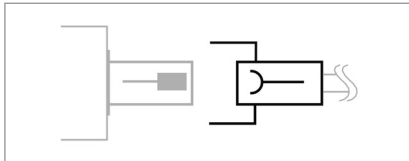
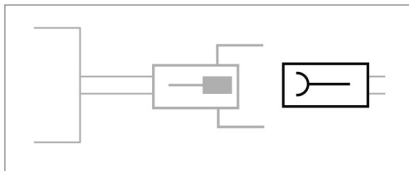
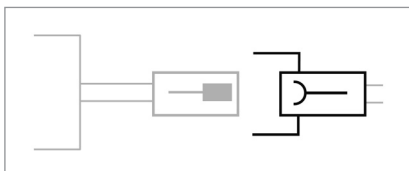

Versions with cable outlet (connection A, B, E or F) are available with various lengths of cable. To order your desired cable length, please add the respective code to the end of your ordering code. Further cable lengths on request.

Code	Cable length
without code	1.5 m
-D0	3 m
-F0	5 m
-K0	10 m
-P0	15 m
-U0	20 m
-V0	25 m

TECHNICAL DATASHEET

Incremental Encoder RI 58-H

Accessories

MOUNTING
CONNECTORS

CONNECTORS

CONNECTORS

CONNECTING CABLES


	Ordering code
Clamping eccentric for synchro flange, d6,5 for M3 (set of three)	0 070 655
Hubshaft with tether as stator coupling	1 531 162

Connector (socket) matching with encoder connector	Ordering code
M23 (Conin), 12 pole, PG9, cw, mating connector for connection C/D/-I	3 539 202

Coupling (socket) matching with encoder cable with connector	Ordering code
M23 (Conin), 12 pole, cw, mating connector for connection -C (cable plug 3 539 186)	3 539 187
M23 (VDW), 12 pole, cw, mating connector for connection -B (cable plug 3 539 252)	3 539 304

Connector (socket) matching with encoder cable with connector	Ordering code
M23 (Conin), 12 pole, ccw, mating connector for connection G/H/-D/-H	3 539 229
M23 (VDW), 12 pole, ccw, mating connector for connection -E (cable plug 3 539 274)	3 539 305

Connecting cables with plug (socket) on one end	Ordering code
M23 (Conin), 12 pole, TPE cable, cw, mating connector for connection C/D/-I, 3 m	1 522 348
M23 (Conin), 12 pole, TPE cable, cw, mating connector for connection C/D/-I, 5 m	1 522 349
M23 (Conin), 12 pole, TPE cable, cw, mating connector for connection C/D/-I, 10 m	1 522 350
M23 (Conin), 12 pole, TPE cable, cw, mating connector for connection C/D/-I, 15 m	1 522 454
M23 (Conin), 12 pole, TPE cable, cw, mating connector for connection C/D/-I, 20 m	1 522 456
M23 (Conin), 12 pole, TPE cable, cw, mating connector for connection C/D/-I, 25 m	1 522 457
M23 (Conin), 12 pole, TPE cable, cw, mating connector for connection C/D/-I, 30 m	1 522 464
M23 (Conin), 12 pole, TPE cable, cw, mating connector for connection C/D/-I, 40 m	1 522 643

TECHNICAL DATASHEET

Incremental Encoder RI 58-H

Accessories

CONNECTING CABLES (continued)

Connecting cables with plug (socket) on one end	Ordering code
M23 (Conin), 12 pole, TPE cable, cw, mating connector for connection C/D/-I, 50 m	1 522 793
M23 (Conin), 12 pole, TPE cable, ccw, mating connector for connection G/H/-D/-H, 3 m	1 522 394
M23 (Conin), 12 pole, TPE cable, ccw, mating connector for connection G/H/-D/-H, 5 m	1 522 395
M23 (Conin), 12 pole, TPE cable, ccw, mating connector for connection G/H/-D/-H, 10 m	1 522 396
M23 (Conin), 12 pole, TPE cable, ccw, mating connector for connection G/H/-D/-H, 15 m	1 522 447
M23 (Conin), 12 pole, TPE cable, ccw, mating connector for connection G/H/-D/-H, 20 m	1 522 461
M23 (Conin), 12 pole, TPE cable, ccw, mating connector for connection G/H/-D/-H, 25 m	1 522 462
M23 (Conin), 12 pole, TPE cable, ccw, mating connector for connection G/H/-D/-H, 30 m	1 522 463
M23 (Conin), 12 pole, TPE cable, ccw, mating connector for connection G/H/-D/-H, 40 m	1 522 463

CONNECTING CABLES

Cable not made up with connectors	Ordering code
PVC cable, 10-core + screen	3 280 114 + length
PVC cable, 6-core + screen	3 280 113 + length
TPE cable, 12-core + screen	3 280 112 + length